

BEST AVAILABLE COPY



GB04/02452



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 17 AUG 2004


WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

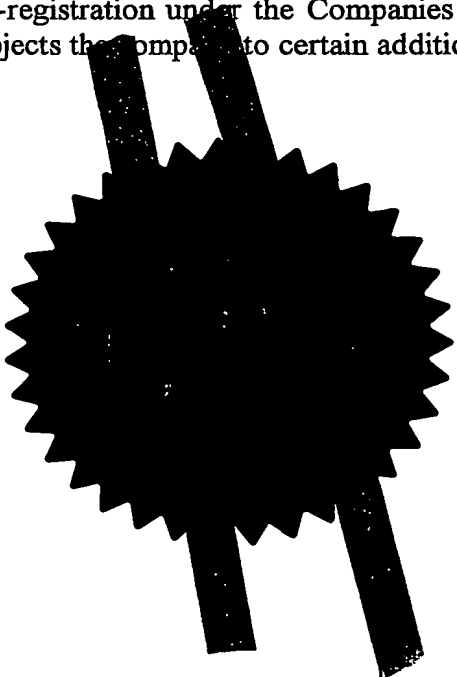


Signed

[Signature]

Dated 9 August 2004

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

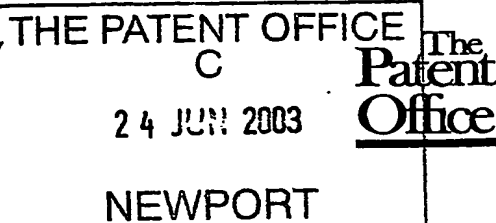

1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference	XA1798		
2. Patent application number (The Patent Office will fill in this part)	0314637.0		24 JUN 2003
3. Full name, address and postcode of the or of each applicant (underline all surnames)	BAE SYSTEMS plc 6 Carlton Gardens London, SW1Y 5AD United Kingdom Patents ADP number (if you know it) 07914674004 ✓ If the applicant is a corporate body, give the country/state of its incorporation United Kingdom		
4. Title of the invention	FLEXI-RIGID PRINTED CIRCUIT BOARD WITH INTEGRAL FLEXIBLE HEAT SINK AREA		
5. Name of your agent (if you have one)	"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode) BAE SYSTEMS plc Group IP Department Lancaster House, P.O. Box 87 Farnborough Aerospace Centre Farnborough, Hampshire, GU14 6YU Patents ADP number (if you know it) 07914674002 ✓		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application		Date of filing (day / month / year)
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES		

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 04

Claim(s) 01

Abstract 01

Drawing(s) 03

+ 3 RM.

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*) 1

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Paul Rooney

Date

20 June 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Maria Burkes 01252 383487

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) *If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- b) *Write your answers in capital letters using black ink or you may type them.*
- c) *If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- d) *If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- e) *Once you have filled in the form you must remember to sign and date it.*
- f) *For details of the fee and ways to pay please contact the Patent Office.*

- 1 -

FLEXI-RIGID PRINTED CIRCUIT BOARD WITH INTEGRAL FLEXIBLE HEAT SINK AREA

This invention relates to a flexi-rigid printed circuit board with integral flexible heat sink area.

5 Conventionally heat is conducted away from key electronic components in a confined area of a printed circuit board by using a soft thermal interface material 1 sandwiched between the electronic components 2 and an aluminium heat spreader 3 as shown in Figure 1 of the accompanying drawings. The soft thermal interface material 1 is used to conform to the electronic component
10 skyline and transfer heat to the aluminium heat spreader 3 from which this heat is then transferred to the external body components 4 of the assembly. This conventional assembly is not cost effective as it requires additional components such as the interface material 1 and aluminium heat spreader 3 which additionally add weight and space requirement to the assembly as well as cost.

15 There is thus a need for a simpler and more cost effective system for conducting heat away from key electronic components on a printed circuit board in a confined area.

 According to a first aspect of the present invention there is provided a flexi-rigid printed circuit board having a rigid area, made up of inner layers of
20 flexible copper and outer layers of rigid insulating material, and an integral flexible heat sink area having springy edge regions of exposed flexible copper layers without outer layers of rigid insulating material, and a metal heat conducting body which is springily engaged by the edge regions to provide a heat sink for the rigid areas of the board.

25 Preferably the exposed flexible copper layers of the springy edge regions are at least partially coated with an anticorrosive material, more preferably at least one of tin, lead, gold.

 Conveniently the board includes tubular metal thermal vias interconnecting flexible copper layers in the rigid area to improve heat transfer
30 through the flexible copper layers.

- 2 -

Advantageously at least some of the thermal vias are located in the rigid area below parts where high heat output components are to be mounted.

Preferably the metal heat conduction body is a shell into which the heat sink area is a push fit and held in place by spring contact between the springy
5 edge regions and the shell.

Conveniently the springy edge regions are in the form of tabs extending from the rigid area.

For a better understanding of the present invention and to show how the same may be carried into effect, reference will now be made to the
10 accompanying drawings, in which;

Figure 1 is a perspective exploded view of a conventional printed circuit board assembly with a heat conduction system not according to the present invention,

Figure 2 is a diagrammatic perspective view of a flexible heat sink area
15 with heat conducting body according to the present invention,

Figure 3 is a perspective view of part of a flexi-rigid printed circuit board according to the present invention,

Figure 4 is a cross-sectional view of an assembled flexi-rigid printed circuit board according to the present invention taken through an assembled
20 flexi-rigid printed circuit board along the line A-A of Figure 5, and

Figure 5 is a perspective exploded view of a flexi-rigid printed circuit board according to the present invention forming part of an assembly.

A flexi-rigid printed circuit board 5 with integral flexible heat sink indicated generally at 6 according to the present invention is shown in Figures 2 to 5 of
25 the accompanying drawings. The flexi-rigid printed circuit board 5 has at least one rigid area 7 made up of inner layers 8 of flexible copper as can best be seen from Figure 4 and outer layers 9 of rigid insulating material. The board 5 includes an integral flexible heat sink area having springy edge regions 10 of exposed flexible copper layers 11 without the outer layers 9 of rigid insulating
30 material.

- 3 -

Also forming part of the integral flexible heat sink area is a metal heat conducting body 12 preferably in the form of a shell as illustrated in Figures 4 and 5. As can be seen specifically from Figure 4 the body 12 is springily engaged by the edge regions 10 to provide a heat sink for the rigid areas 7 of the printed circuit board 5. As can be seen more clearly from Figure 4, the heat sink area 7 is a push fit into the shell 12 and is held in place by spring contact between the springy edge regions 10 and the inner wall of the body 12.

Preferably the springy edge regions 10, as can be seen from the three stage drawing of Figure 2, are in the form of tabs extending from the rigid area 7. These tabs can be bent upwardly out of the plane of the rigid area 7 as can be seen on the top right hand of Figure 2 and eventually are butted together as shown in the bottom right portion of Figure 2 to provide effectively a circular form as shown in cross-section in Figure 4. It is to be understood, however, that although the rigid area 7 has been illustrated as basically circular in plan with the springy edge regions 10 extending radially as tabs therefrom and with the body 12 having a tubular format, any other shape of rigid area 7, springy edge regions 10 and body 12 desired can be provided and utilised.

The springy edge regions 10 which effectively form extensions to the rigid area 7 are in the form of the exposed copper layers which extend integrally and as part of the inner layers 8 of flexible copper within the rigid area 7. Preferably the exposed layers of flexible copper which form the springy edge regions 10 are at least partially coated with anti corrosion material such as tin, lead and/or gold, for conductivity and corrosion resistance purposes. Thus the heat conducting layer provided by the inner layers of heat flexible copper runs into the rigid area 7 wherever it can and as many layers as possible are joined with thermal vias 13 as shown in Figure 4. These thermal vias are conveniently tubular metal thermal vias which interconnect the flexible copper layers 8 in the rigid area 7 to improve heat transfer between the flexible copper layers. At least some of the thermal vias 13, as shown in Figure 4, are located in the rigid area 7 below parts where high heat output components 14 are to be mounted.

The invention thus requires fewer components than the conventional solution described in respect of Figure 1, requires no additional assembly time

- 4 -

and has minimal extra space requirements as the flexible heat sink is very thin. This can be seen by a comparison between the conventional Figure 1 assembly and the assembly of Figure 5 which incorporates a flexi-rigid printed circuit board according to the present invention. In the illustration of Figure 5 the rigid area 7 of the flexi-rigid printed circuit board has been shown without electrical components 15 for convenience. The electrical components 15 are nested together and secured to the rigid area 7 and springy edge regions 10 by means of a mounting plate 16 and connecting strap 17. A further casing cover 18 is provided for the assembly to cover the components 15.

- 5 -

CLAIMS

1. A flexi-rigid printed circuit board having a rigid area, made up of inner layers of flexible copper and outer layers of rigid insulating material, and
5 an integral flexible heat sink area having springy edge regions of exposed flexible copper layers without outer layers of rigid insulating material, and a metal heat conducting body which is springily engaged by the edge regions to provide a heat sink for the rigid areas of the board.
2. A flexi-rigid printed circuit board according to Claim 1, wherein the
10 exposed flexible copper layers of the springy edge regions are at least partially coated with an anti corrosion material.
3. A flexi-rigid circuit board according to claim 2, wherein the anti corrosion material is at least one of tin, lead, gold.

4. A flexi-rigid printed circuit board according to anyone of Claims 1 to 3,
15 including tubular metal thermal vias inter-connecting flexible copper layers in the rigid area to improve heat transfer between the flexible copper layers.
5. A flexi-rigid printed circuit board according to Claim 4, in which at least
20 some of the thermal vias are located in the rigid area below parts where high heat output components are to be mounted.
6. A flexi-rigid printed circuit board according to any one of Claims 1 to 5, wherein the metal heat conducting body is a shell into which the heat sink area is a push fit and held in place by spring contact between the springy edge regions and the shell.
- 25 7. A flexi-rigid printed circuit board according to any one of Claims 1 to 6, wherein the springy edge regions are in the form of tabs extending from the rigid area.
8. A flexi-rigid printed circuit board substantially as hereinbefore described
30 and as illustrated in any one of Figures 2 to 5 of the accompanying drawings.

- 6 -

ABSTRACT

A flexi-rigid printed circuit board (5) has a rigid area (7) made up of inner layers (8) of flexible copper and outer layers (9) of rigid insulating material. The board (5) includes an integral flexible heat sink area having springy edge regions (10) of exposed flexible copper layers without outer layers (9) of rigid insulating material, and a metal heat conducting body (12) which is springily engaged for the rigid areas (7) of the board (5).

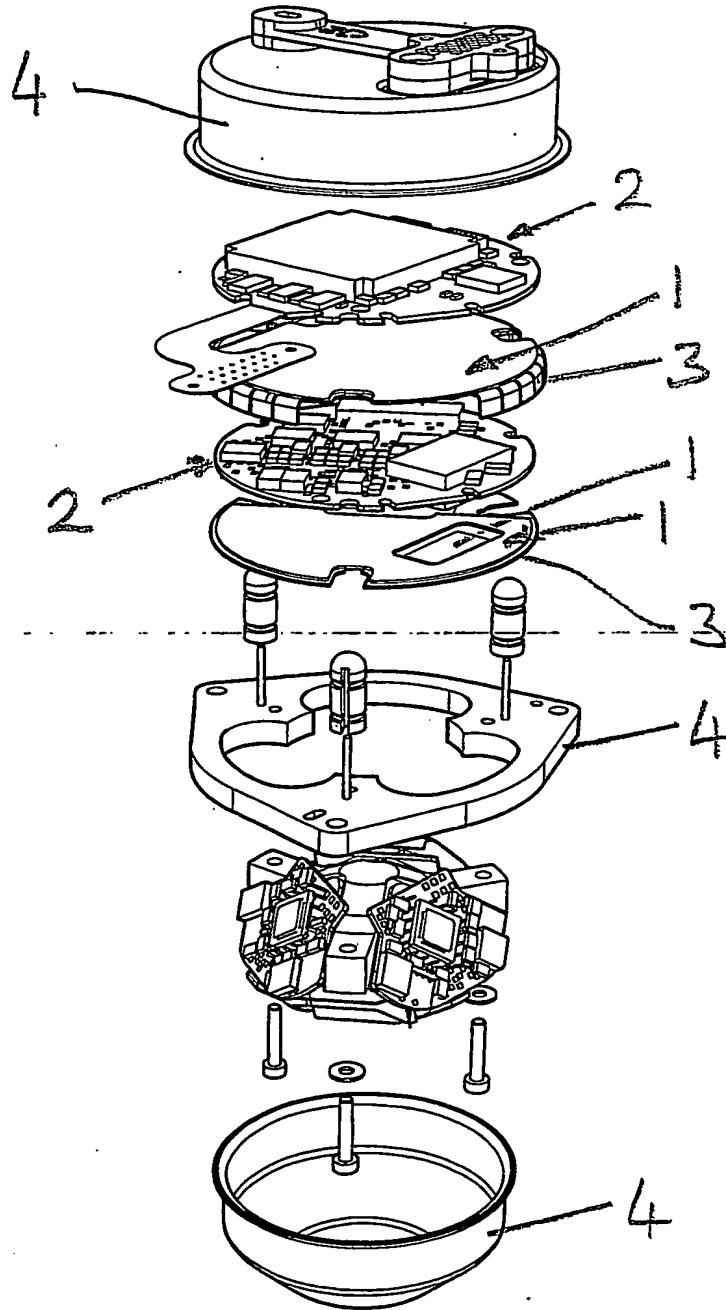
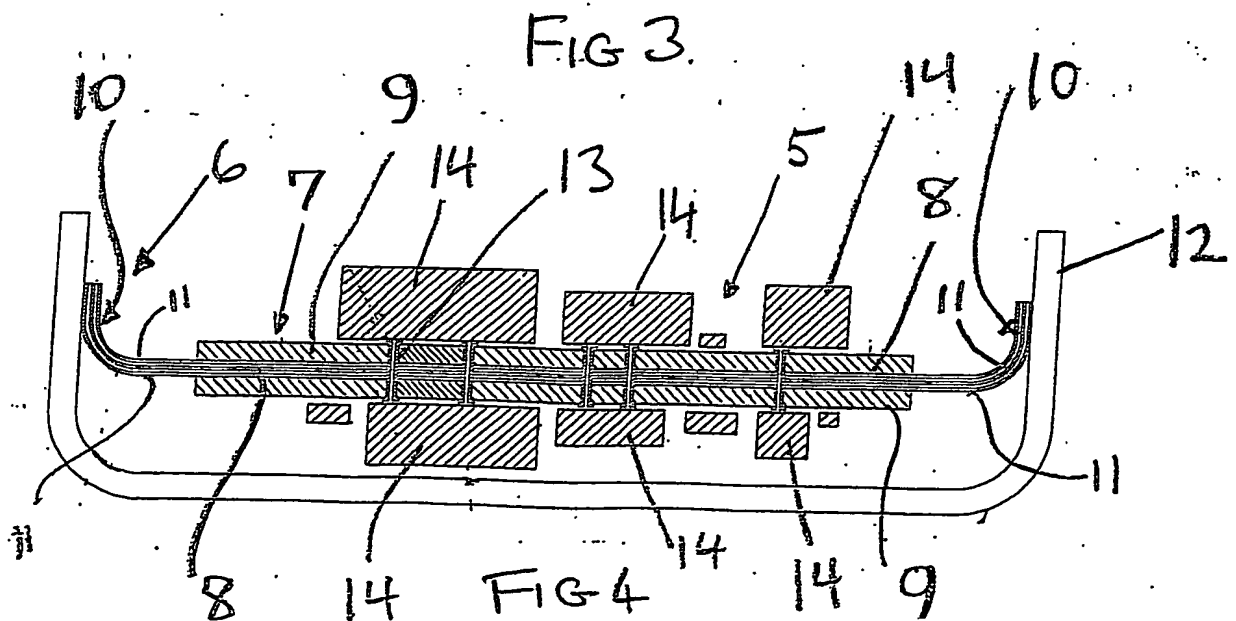
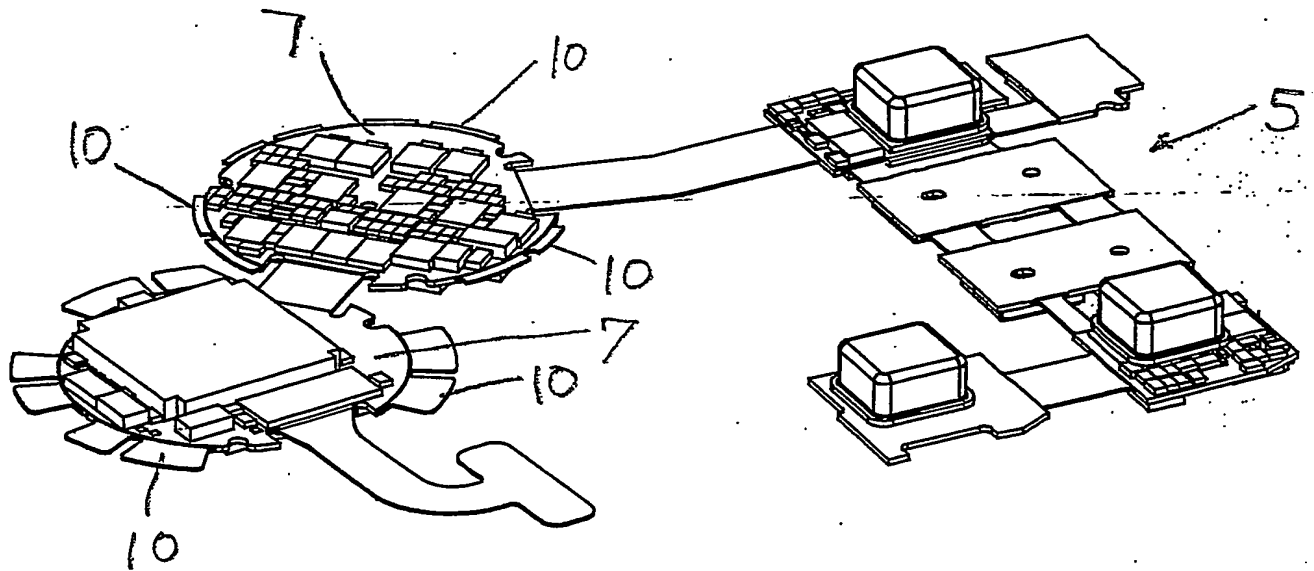
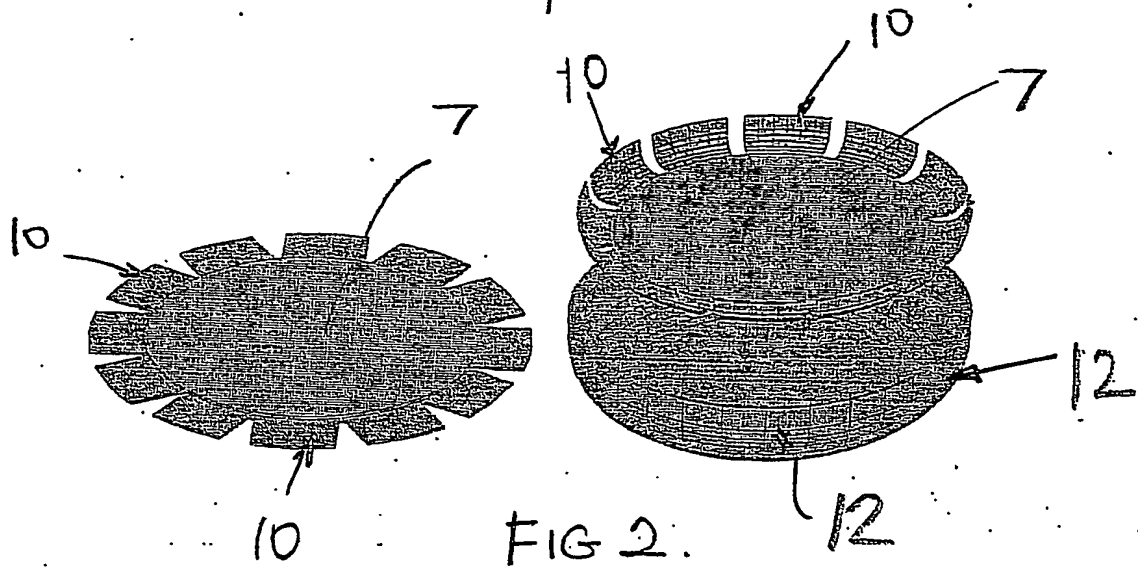


FIG. 1.



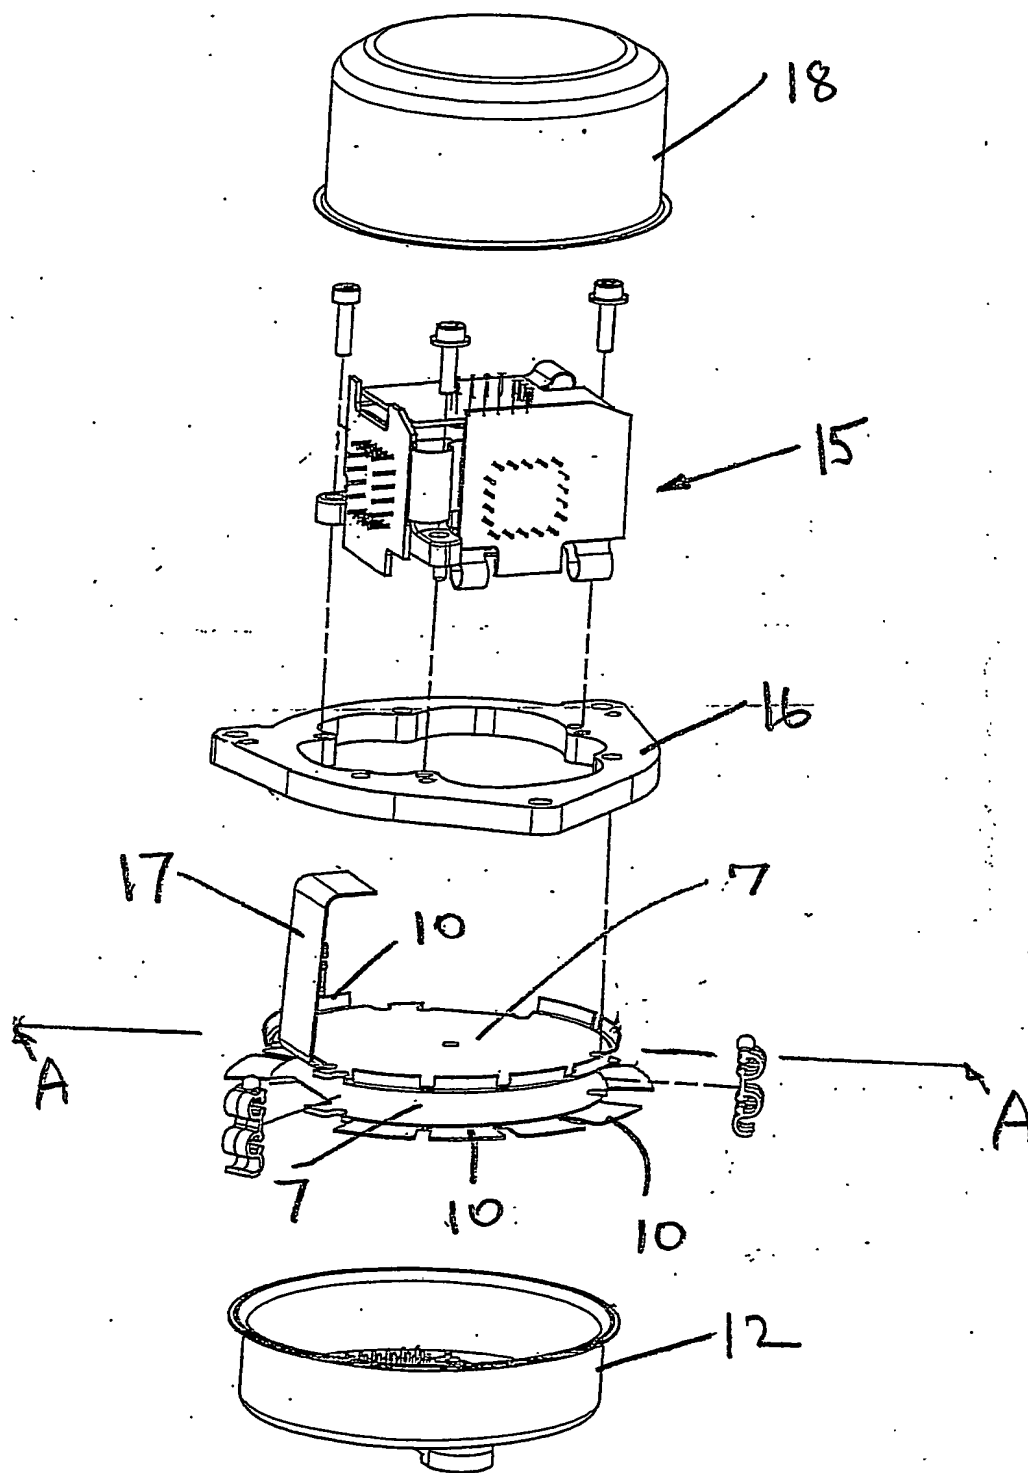


FIG 5.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.